


12.6V BMS 3S 40A 18650 Lithium Battery Protection Board With Balance

Slug: 12-6v-bms-3s-40a-18650-lithium-battery-protection-board-balance

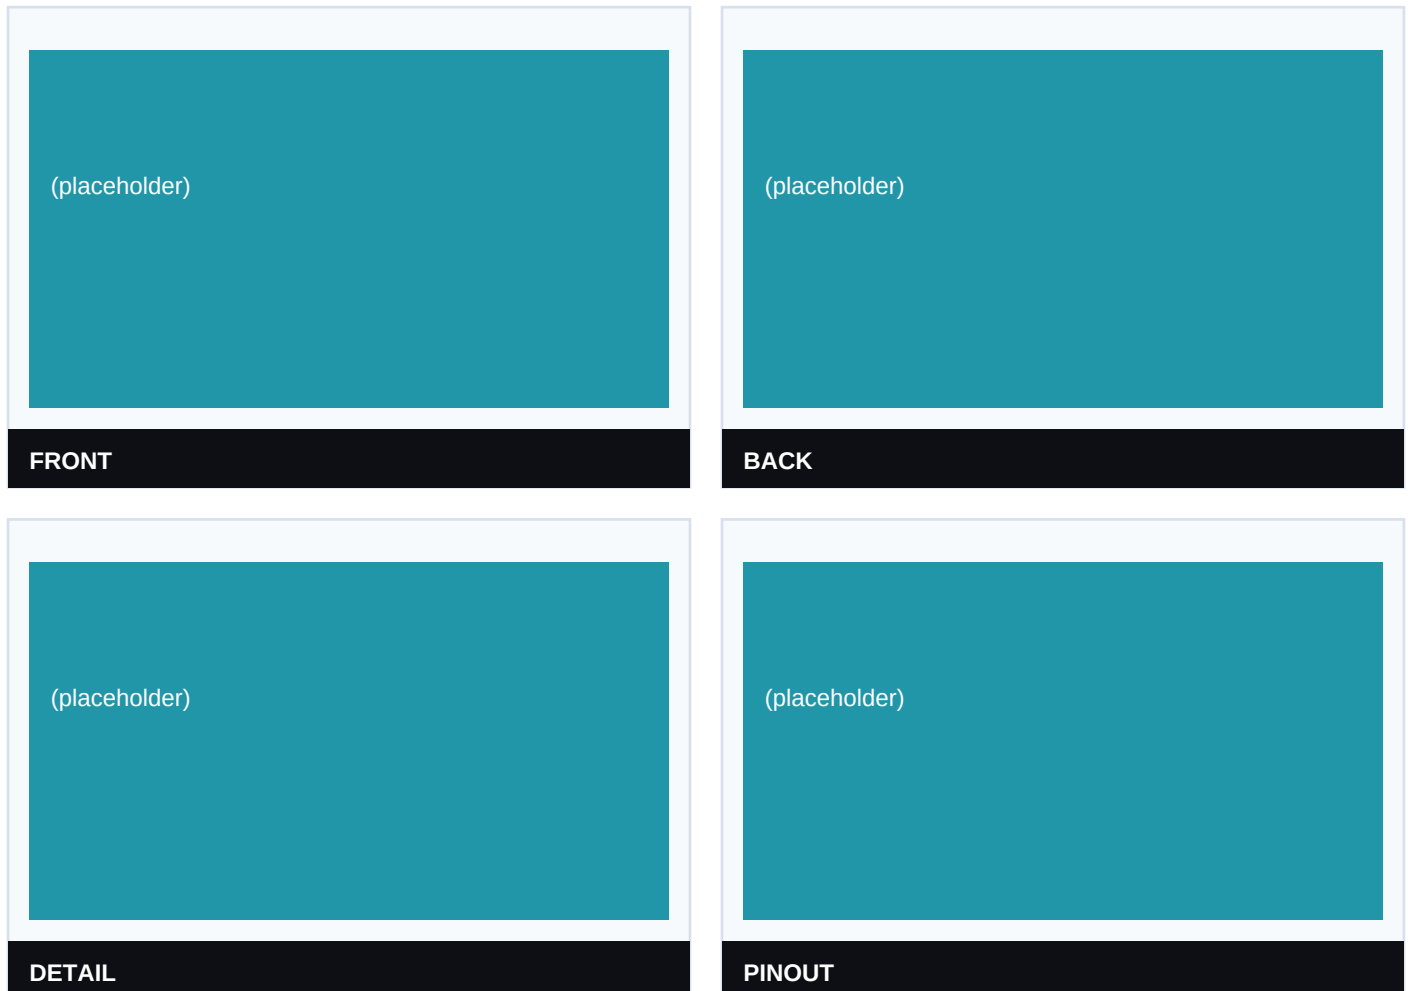

TECHNICAL SPECIFICATIONS & SUMMARY

[Lithium Battery Protection Board] 3 Series 40A 18650 Lithium Battery Protection Board 11.1V 12.6V with Balance for Drill Motor Lipo Cell Module The 3 Series 40A 18650 Lithium Battery Protection Board 11.1V 12.6V with Balance for Drill Motor Lipo Cell Module comes with recovery function-AUTO Recovery and Integrated 10 low load resistance MOS tube. It provides a continuous discharge of 40A, 100mA balanced current, for electric drill/sprayer/LED lights/low power inverter. (if the cooling environment is not good, please reduce the load current use). The Scope of Nominal voltage of 3.6V, 3.7V lithium battery (including 18650,26650, a polymer lithium battery) where Charging voltage can be range between 16.8V to 18.1V The board operates smoothly with Continuous charge current of (upper limit): 20A. The balanced version is suitable for starting current below 80A, power 135W below the drill (with balance). The Board comes in a size of approx. 46 x 60 x 3.4 mm which can be easily installed in a compact size or on battery bundle itself. You can check our others BMS. Click here Features: 3S 11.1V

UNIT PRICE (EX. GST)

Rs. 129

WITH 18% GST

Rs. 152

In stock: 10 units - HSN: 85423100

Order online at uniksystem.in or email Unik.systems98@gmail.com for bulk pricing.