


WS2812B 60LED/mtr 5M DC 5V Addressable LED Strip Roll

Non Waterproof 5 Meter

Slug: 5m-dc-5v-ws2812b-60led-mtr-addressable-led-strip-roll-non-waterproof-5-meter

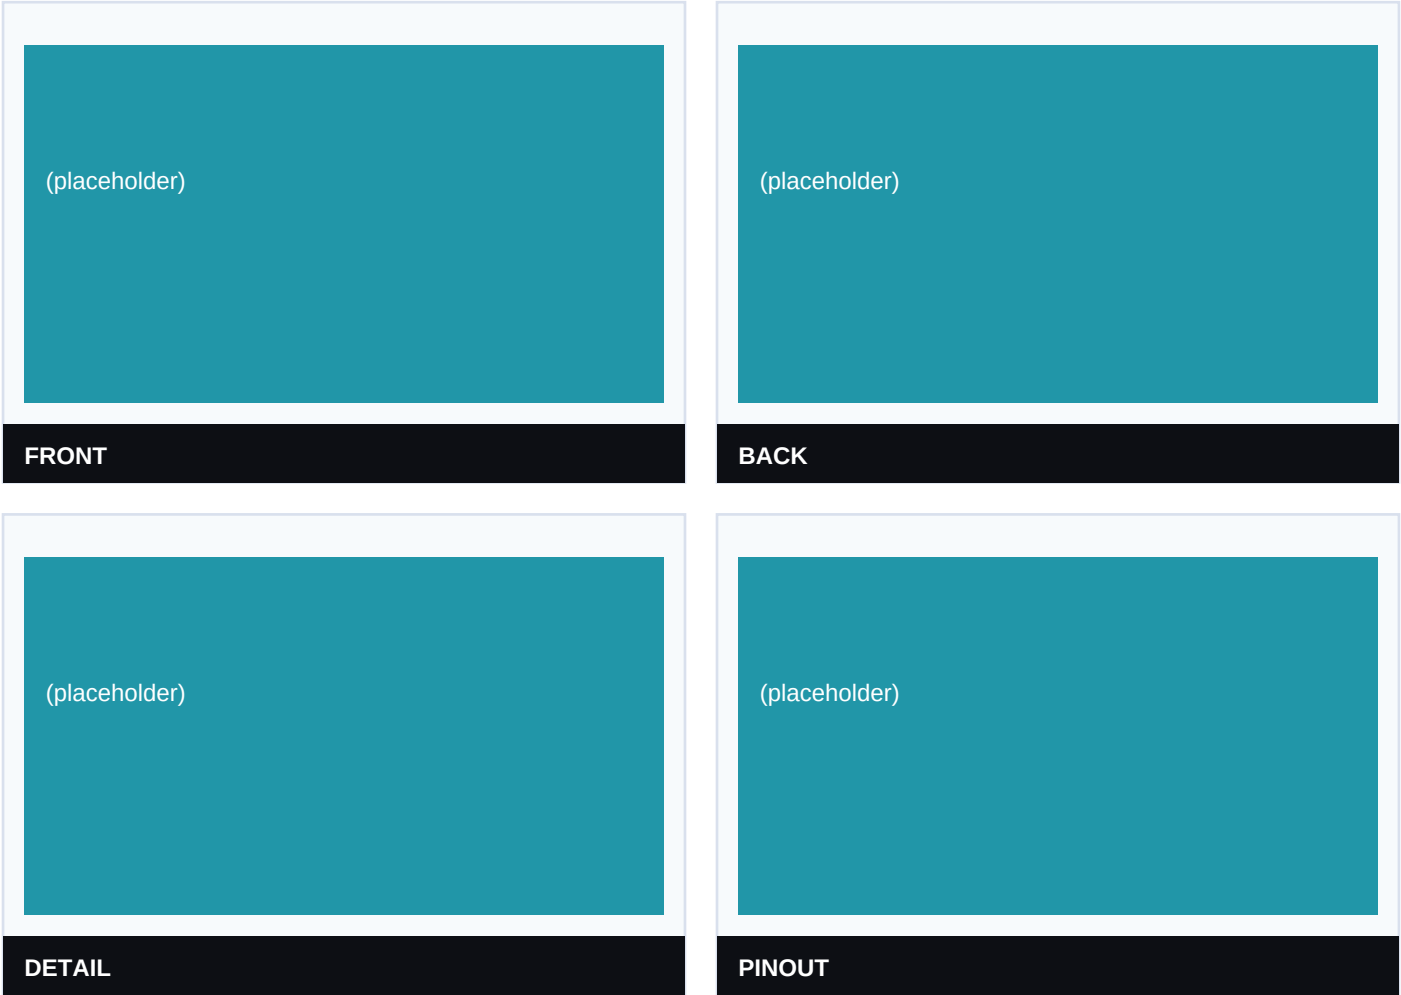

TECHNICAL SPECIFICATIONS & SUMMARY

[RGB LED Strip] This is WS2812B Addressable LED Strip DC 5V (Non-Waterproof) 60 LEDs/m. The installation surface must be smooth, clean, and dry. The part of LED components cannot be fixed on the surface of the sharp edges. The strip should not be collided or crushed. The strip can be cut following the cutting lines 24-bit colour control (8-bit PWM per channel); 16.8 million colours per pixel. The one-wire digital control interface with each RGB LED draws approximately 50 mA at 5 V with red, green, and blue at full brightness. Choose Quantity - 5m Roll. 5m total length. 60 LEDs/m. 24-bit color control (8-bit PWM per channel). 16.8 million colors per pixel. The one-wire digital control interface. Each RGB LED draws approximately 50 mA at 5 V with red, green, and blue at full brightness. Waterproof. SPECIFICATIONS Voltage 5 V Current 50 mA Approx. colour control 24-bit Length 1m/5m Leds/Meter 60 Max. Power 15W

UNIT PRICE (EX. GST)	WITH 18% GST
Rs. 859	Rs. 1,014

In stock: 10 units - HSN: 85423100
Order online at uniksystem.in or email Unik.systems98@gmail.com for bulk pricing.