


4 Series 40A 18650 Lithium Battery Protection Board 14.8V 16.8V with Balance for Drill Motor Lipo Cell Module 4S 40A

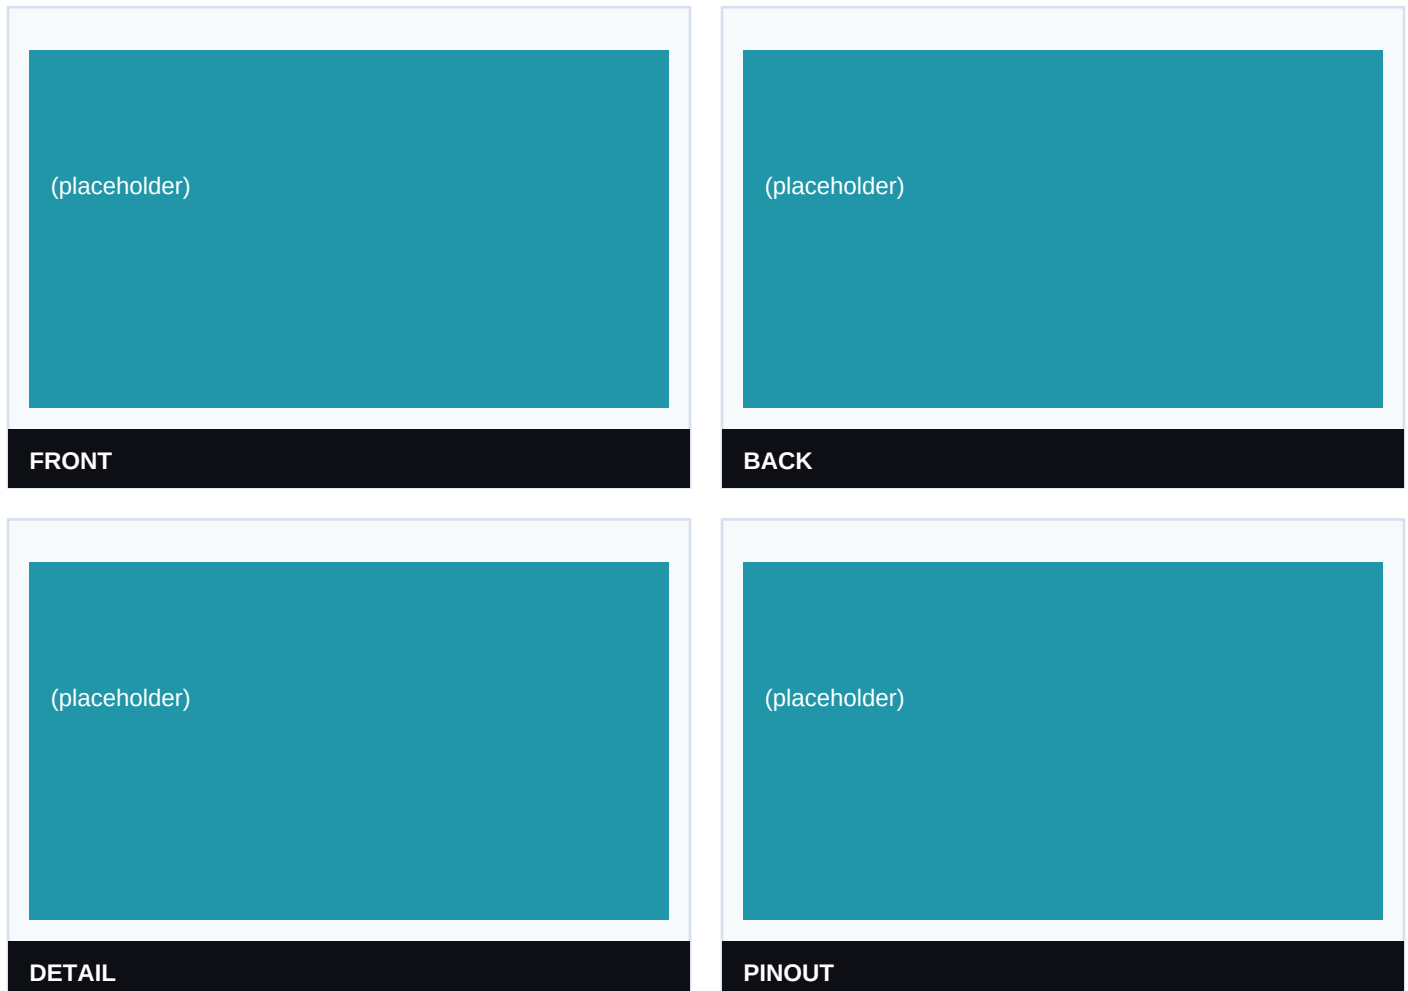

TECHNICAL SPECIFICATIONS & SUMMARY

[Lithium Battery Protection Board] The 4 Series 40A 18650 Lithium Battery Protection Board 14.8V 16.8V with Balance for Drill Motor Lipo Cell Module comes with recovery function - AUTO Recovery and Integrated 10 low load resistance MOS tube. It provides a continuous discharge of 40A, 100mA balanced current, for electric drill/sprayer/LED lights/low power inverter. (If the cooling environment is not good, please reduce the load current use). The Scope of Nominal voltage of 3.6V, 3.7V lithium battery (including 18650, 26650, a polymer lithium battery) where Charging voltage can be range between 16.8V to 18.1V The board operates smoothly with Continuous charge current of (upper limit): 20A. The balanced version is suitable for starting current below 80A, power 135W below the drill (with balance). The Board which can be easily installed in a compact size or on battery bundle itself. Note: The Successful start of the drill requires a three 15C-20C power battery, or six 10C-15C power battery (ordinary 18650 cannot start the drill!!!). Strictly according to map wiring 0V, 4.2V, 8.4V, 12.6V,

UNIT PRICE (EX. GST)

Rs. 119

WITH 18% GST

Rs. 140

In stock: 10 units - HSN: 85423100

Order online at uniksystem.in or email Unik.systems98@gmail.com for bulk pricing.